


TÜNKERS® Marking Unit

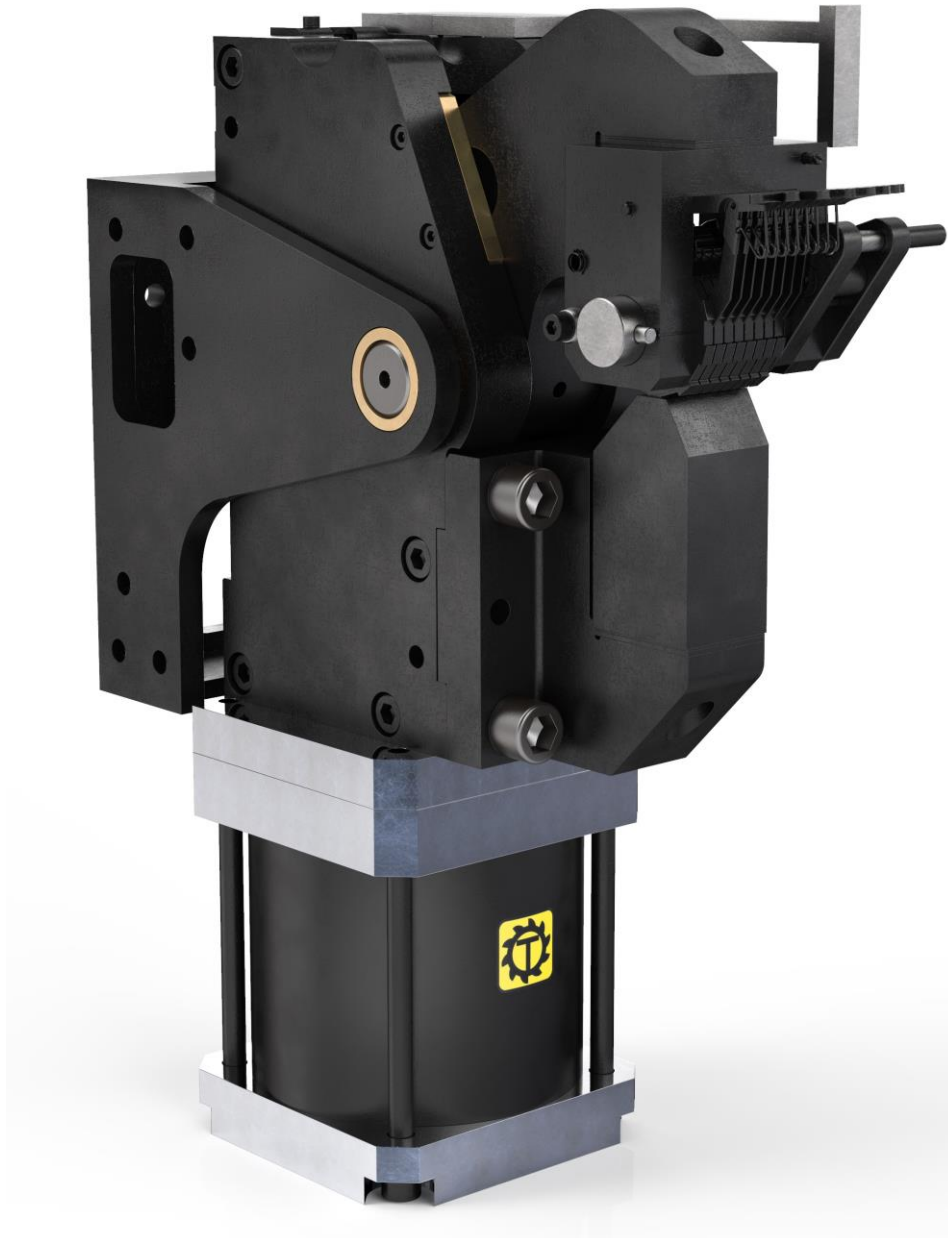

PFS 400-60 PO Operation Instruction 260264

Contents

1.0	Description.....	3
2.0	Safety precautions.....	4
3.0	Installation	5
4.0	Adjustment of the embossing depth.....	6
5.0	Exchange of tools	7
6.0	Exchange of limit switches.....	8
7.0	Maintenance	9
8.0	Wiring diagram	11
9.0	Appendix.....	12

Please give us the details written on the type plate, when you order spare parts or when you need further information!

1.0 Description

The marking unit is a flexible tool system especially designed for the requirements of large-scale manufacturing. Being a machine component, the marking unit can only be made into a functioning system by combining it with a hydraulic or a pneumatic control system. The clamp consists of the following modules:

- Double-acting pneumatic or hydraulic cylinder in a single or tandem construction.
- Tool housing with integrated toggle lever system and adapter for the attachment of tools.
- Swivel arm for holding the inserted tools (punch, die/piercing die bush).
- Pressure jaw for holding the opposing tool (punch, die/piercing die bush).
- Optional swivel support, either spring centred or with pneumatic equalizer.

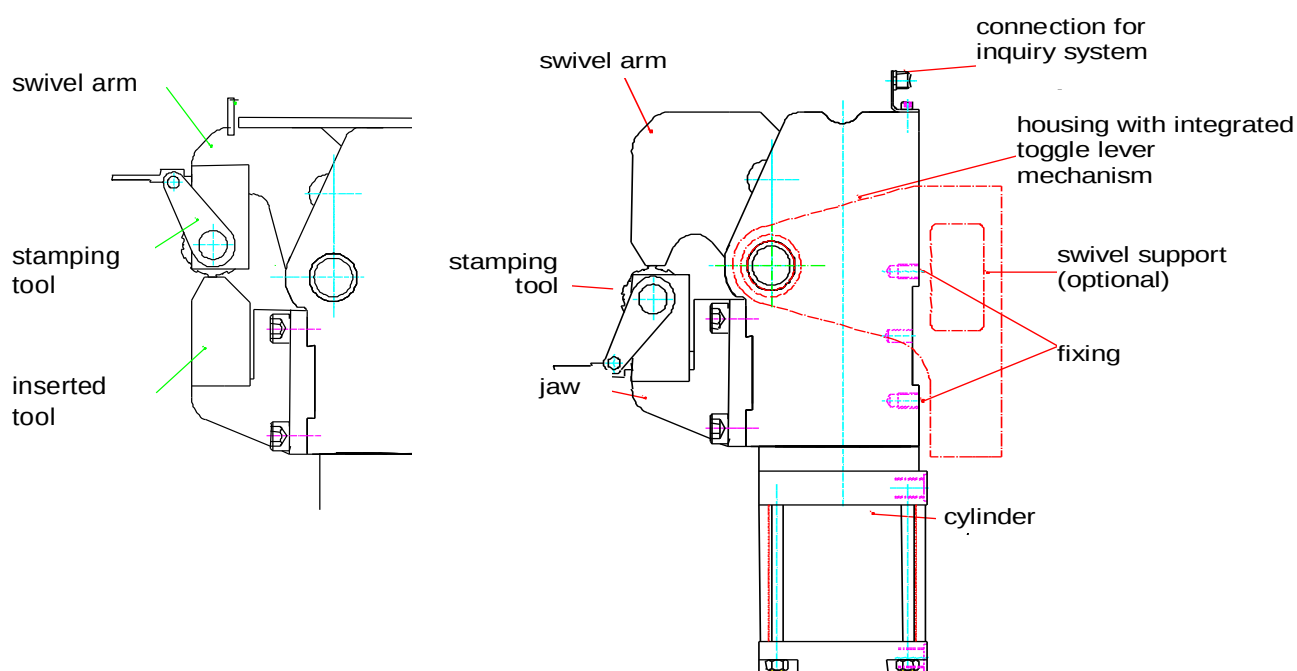


Fig. 1: Basic construction of the marking unit

How it works:

When the pneumatic cylinder is pressurised, a toggle lever mechanism integrated into the tool housing is operated which drives the swivel arm. At the end position of the mechanism a force multiplication of 1:10 is reached resulting in the high forces required for the forming application. The integrated stop makes sure that the arm is always moved to a reproducible end position.

By pressurising the piston ring side of the cylinder the return stroke is initiated. The position is monitored by integrated sensors.

2.0 Safety precautions

Safety precautions to be observed by the user

This description contains the information required to use the products for the purpose for which they were designed. This information is intended for the use of suitably qualified persons.

The term “qualified” refers to persons, over 18 years of age, whose education, experience and training – along with their knowledge of the applicable norms, rules, accident-prevention regulations and working practices – qualify them to take responsibility for the safe operation of the machine and carry out the corresponding tasks to ensure that possible hazards can be identified and avoided (definition of qualified staff as per IEC 364).

Danger warnings:

The following warnings are designed to ensure the personal safety of operating staff and also the safe operation both of the products described and of items of equipment connected to them.



DANGER: This means that there is an immediate danger to the life or health of the user, if the corresponding preventative precautions are not observed.



CAUTION: Indicates a possible danger of damage to the machine or other items of equipment, if the corresponding preventative precautions are not observed.

- The marking unit is not designed as a ready-to-use freestanding tool, and is therefore not equipped with its own safety devices. The safety precautions shall not be regarded as fulfilled until the device has been correctly incorporated into a system of production and a corresponding safety control system has been installed.
- Before mounting and starting the marking unit, please read and follow these operation instructions.



CAUTION! Danger of crushing! Punch and die can crush or sever fingers!

- DO NOT reach into the working area of the stamping tool while it is in operation.
- Shut down the marking unit immediately in the event of any malfunction that is likely to affect personal safety.
- Before carrying out work in the tool area, disconnect the pressure supply to the power unit (compressed-air conduit).
- All maintenance work must be carried out by qualified service personnel and with the machine shut down.
- Ensure that all safety devices are refitted correctly after maintenance work has been carried out.
- The manufacturer is not liable for damage resulting from using other than original spare parts.

3.0 Installation

The marking unit must not be manipulated before it is connected to the pneumatic system.

- The unit is attached to the intended fastening areas on the housing or the swivel support by means of cylinder-head screws and pins.
- Connect the pressure supply between the supply lines and the cylinder. Please note that the maximum pressure quoted in the technical data must not be exceeded.
- Connect electro-coupling corresponding to the electrical design (see circuit diagram fig. 3) onto the connection plug " M12" (fig. 2) and tighten the screws.



CAUTION: Operation with incorrect or too high voltage can lead to short circuiting and danger to personnel.

Function of the integrated LEDs is as follows:

green..... operating voltage
red..... unit is closed
yellow unit is open

4.0 Adjustment of the embossing depth

By means of compensation shims (enclosed in the delivery) beneath the marking unit, the embossing depth can be adjusted and matched to the thickness of the sheet being used. For doing this the marking unit must be dismantled (see 5. Exchange of marking unit). Please note that the maximum embossing force is only reached when the toggle lever mechanism reaches its limiting position (visual check: the support roller touches the stop on the housing).



CAUTION: The embossing action must only occur while a metal sheet is inserted. Without the metal sheet the inserted tool could become damaged.



CAUTION: During maintenance work the safety rules according to section 2 must be observed and followed.

5.0 Exchange of tools

The tools are built into the tool jaw or swivel arm. Before the tools are exchanged, the swivel arm has to be moved into the open position.

- Loosen the M10 cylinder head screw which you will find beneath either the tool jaw or the swivel arm.
- Remove the marking tool or the die holder.
- Exchange the tools.
- Install the new tools in reverse order.

After exchanging the tools the marking unit has to be driven slowly into closed position in order to check whether the tools are standing in correct position to each other.

6.0 Exchange of limit switches

- Loosen the fastening screws (Pos. 190 + 220).
- Pull the switch sheet metal (Pos. 180) with the limit switches upwards out of the housing and replace the limit switches.
- Push the switch sheet metal (Pos. 180) carefully into the housing.
CAUTION: The switch sheet metal must be positioned between the lower spring dowel sleeve and the housing, otherwise there is a risk of collision!
- Tighten the fastening screws (Pos. 190 + 220).



CAUTION: A switch can only be replaced as the complete unit, i.e. both switches have to be replaced. When installing the electric switches, care must be taken that the new switches are installed in a position appropriate to the opening angle. The plug assignment will be found in the technical data (fig.3).

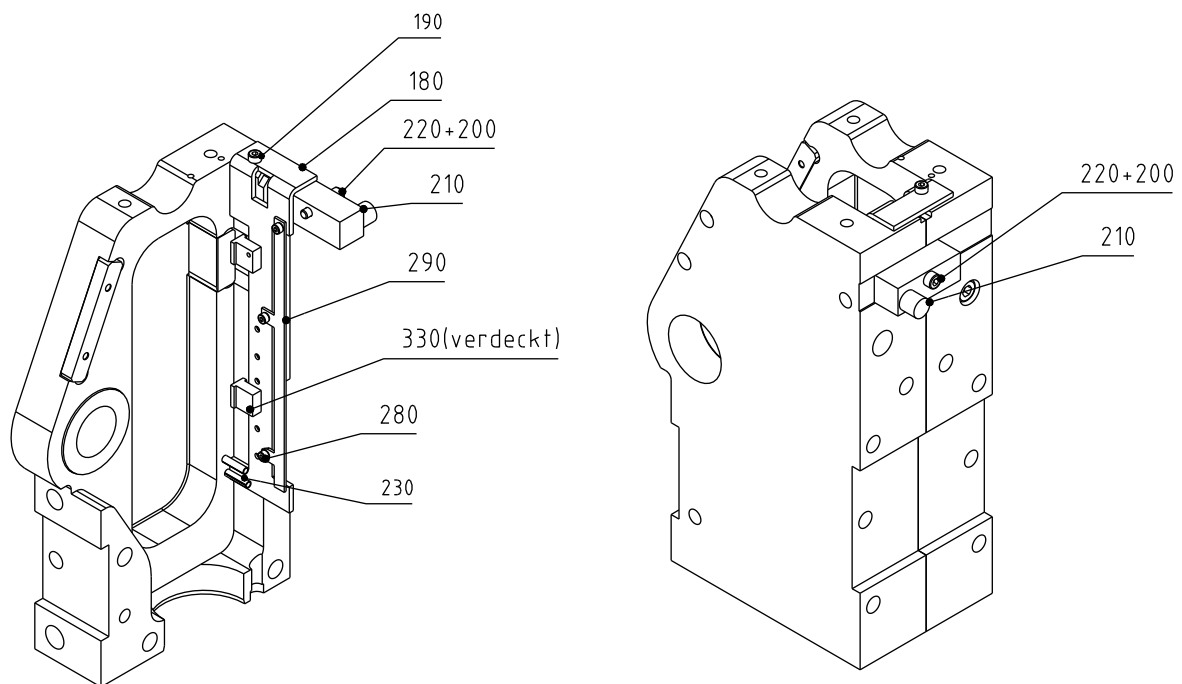


Fig. 2: Exchange of limit switches

7.0 Maintenance

Carrying out all required maintenance and monitoring work is a precondition for the problem-free functioning of the marking unit. Appropriately trained specialists may only carry out maintenance and monitoring work during standstill. After maintenance work has been carried out, the protection devices are to be correctly refitted.



The inserted tools have to be cleaned at regular intervals using compressed air or something equivalent, in order to guarantee the problem-free functioning of the marking unit. All the other components of the marking unit are largely protected from contamination and do not need to be specially cleaned.


NOTE: One of the most important servicing jobs is keeping all the hose connections clean. The couplings must be fitted with covers. Before installing the coupling for the hydraulic or pneumatic hoses, care must be taken that the coupling and threads are kept clean.

Part	Daily	Weekly	Monthly
1 Tools	B		
2 Pneumatic connections		A	
3 Marking unit complete		B	
4 Guide beads			C

A = check for leakage

B = check, general visual inspection

C = grease lightly as necessary

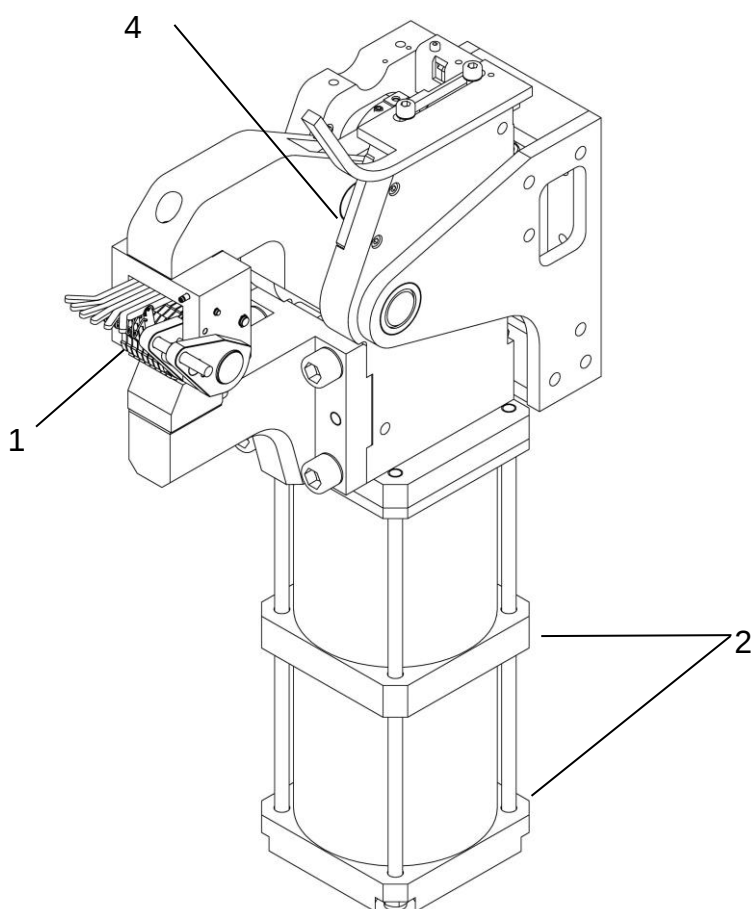

8.0 Wiring diagram



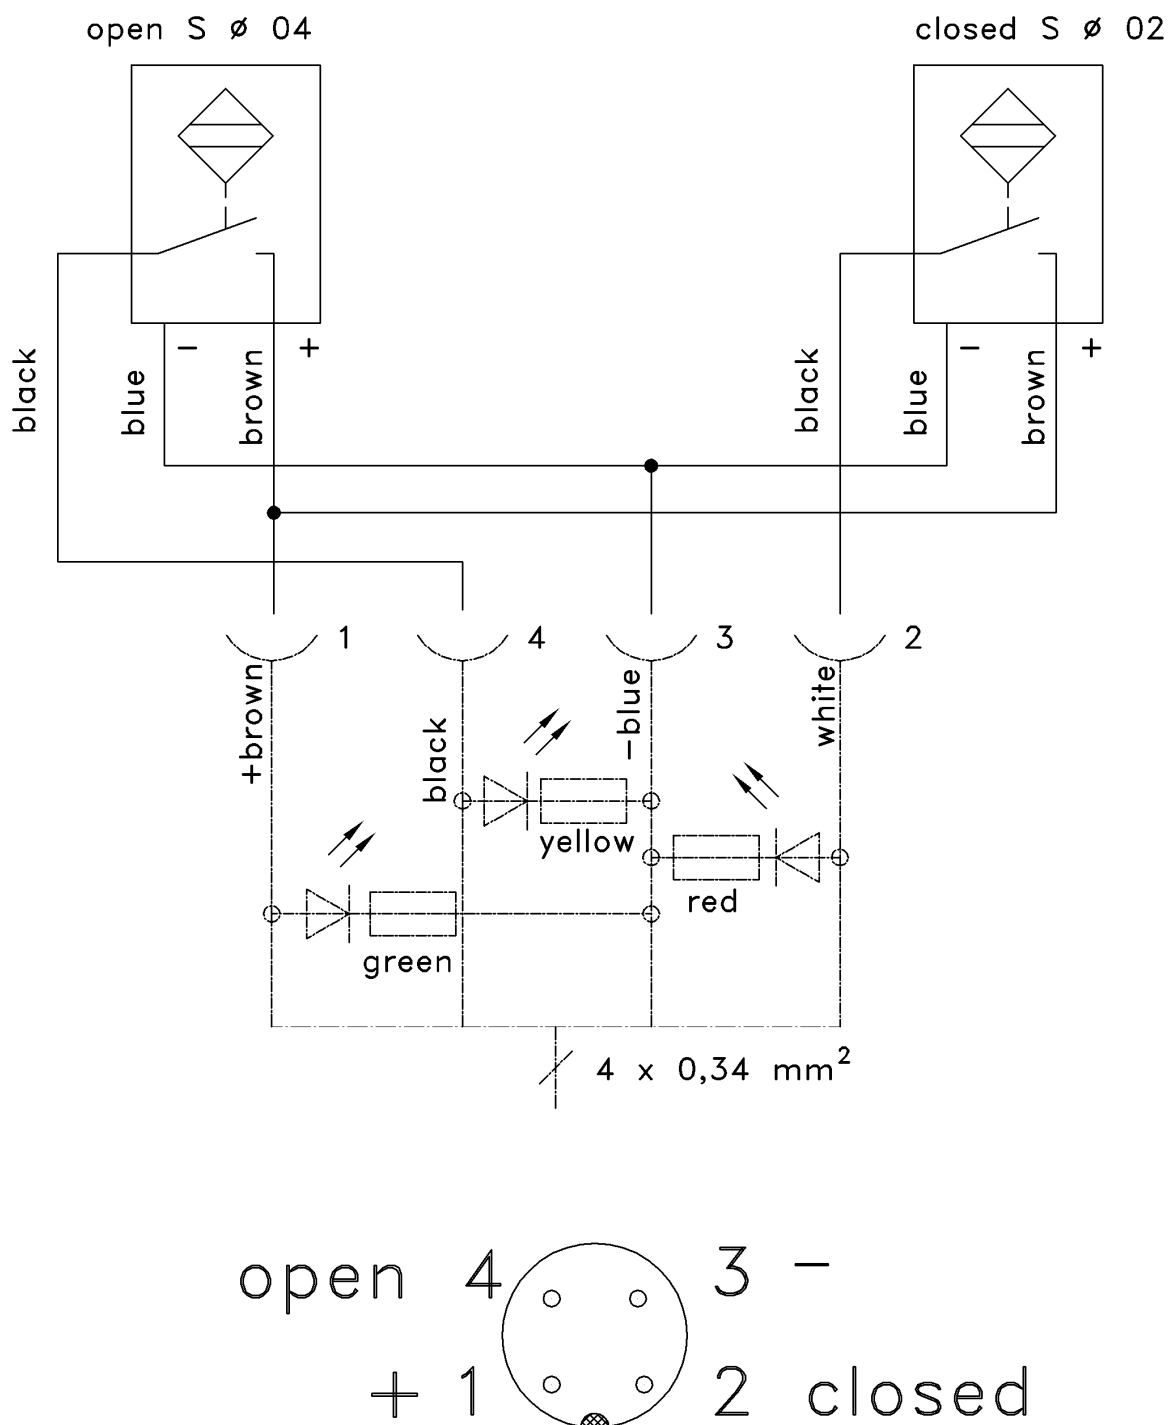



Fig. 3: Wiring diagram limit switch set T12

9.0 Appendix

- Drawing no. 7297703100 (260264)
- Drawing marking tool 218238
- Spare parts drawing PFS 400
- Spare parts lists housing, swivel support cylinder
- Spare parts list and drawing tools

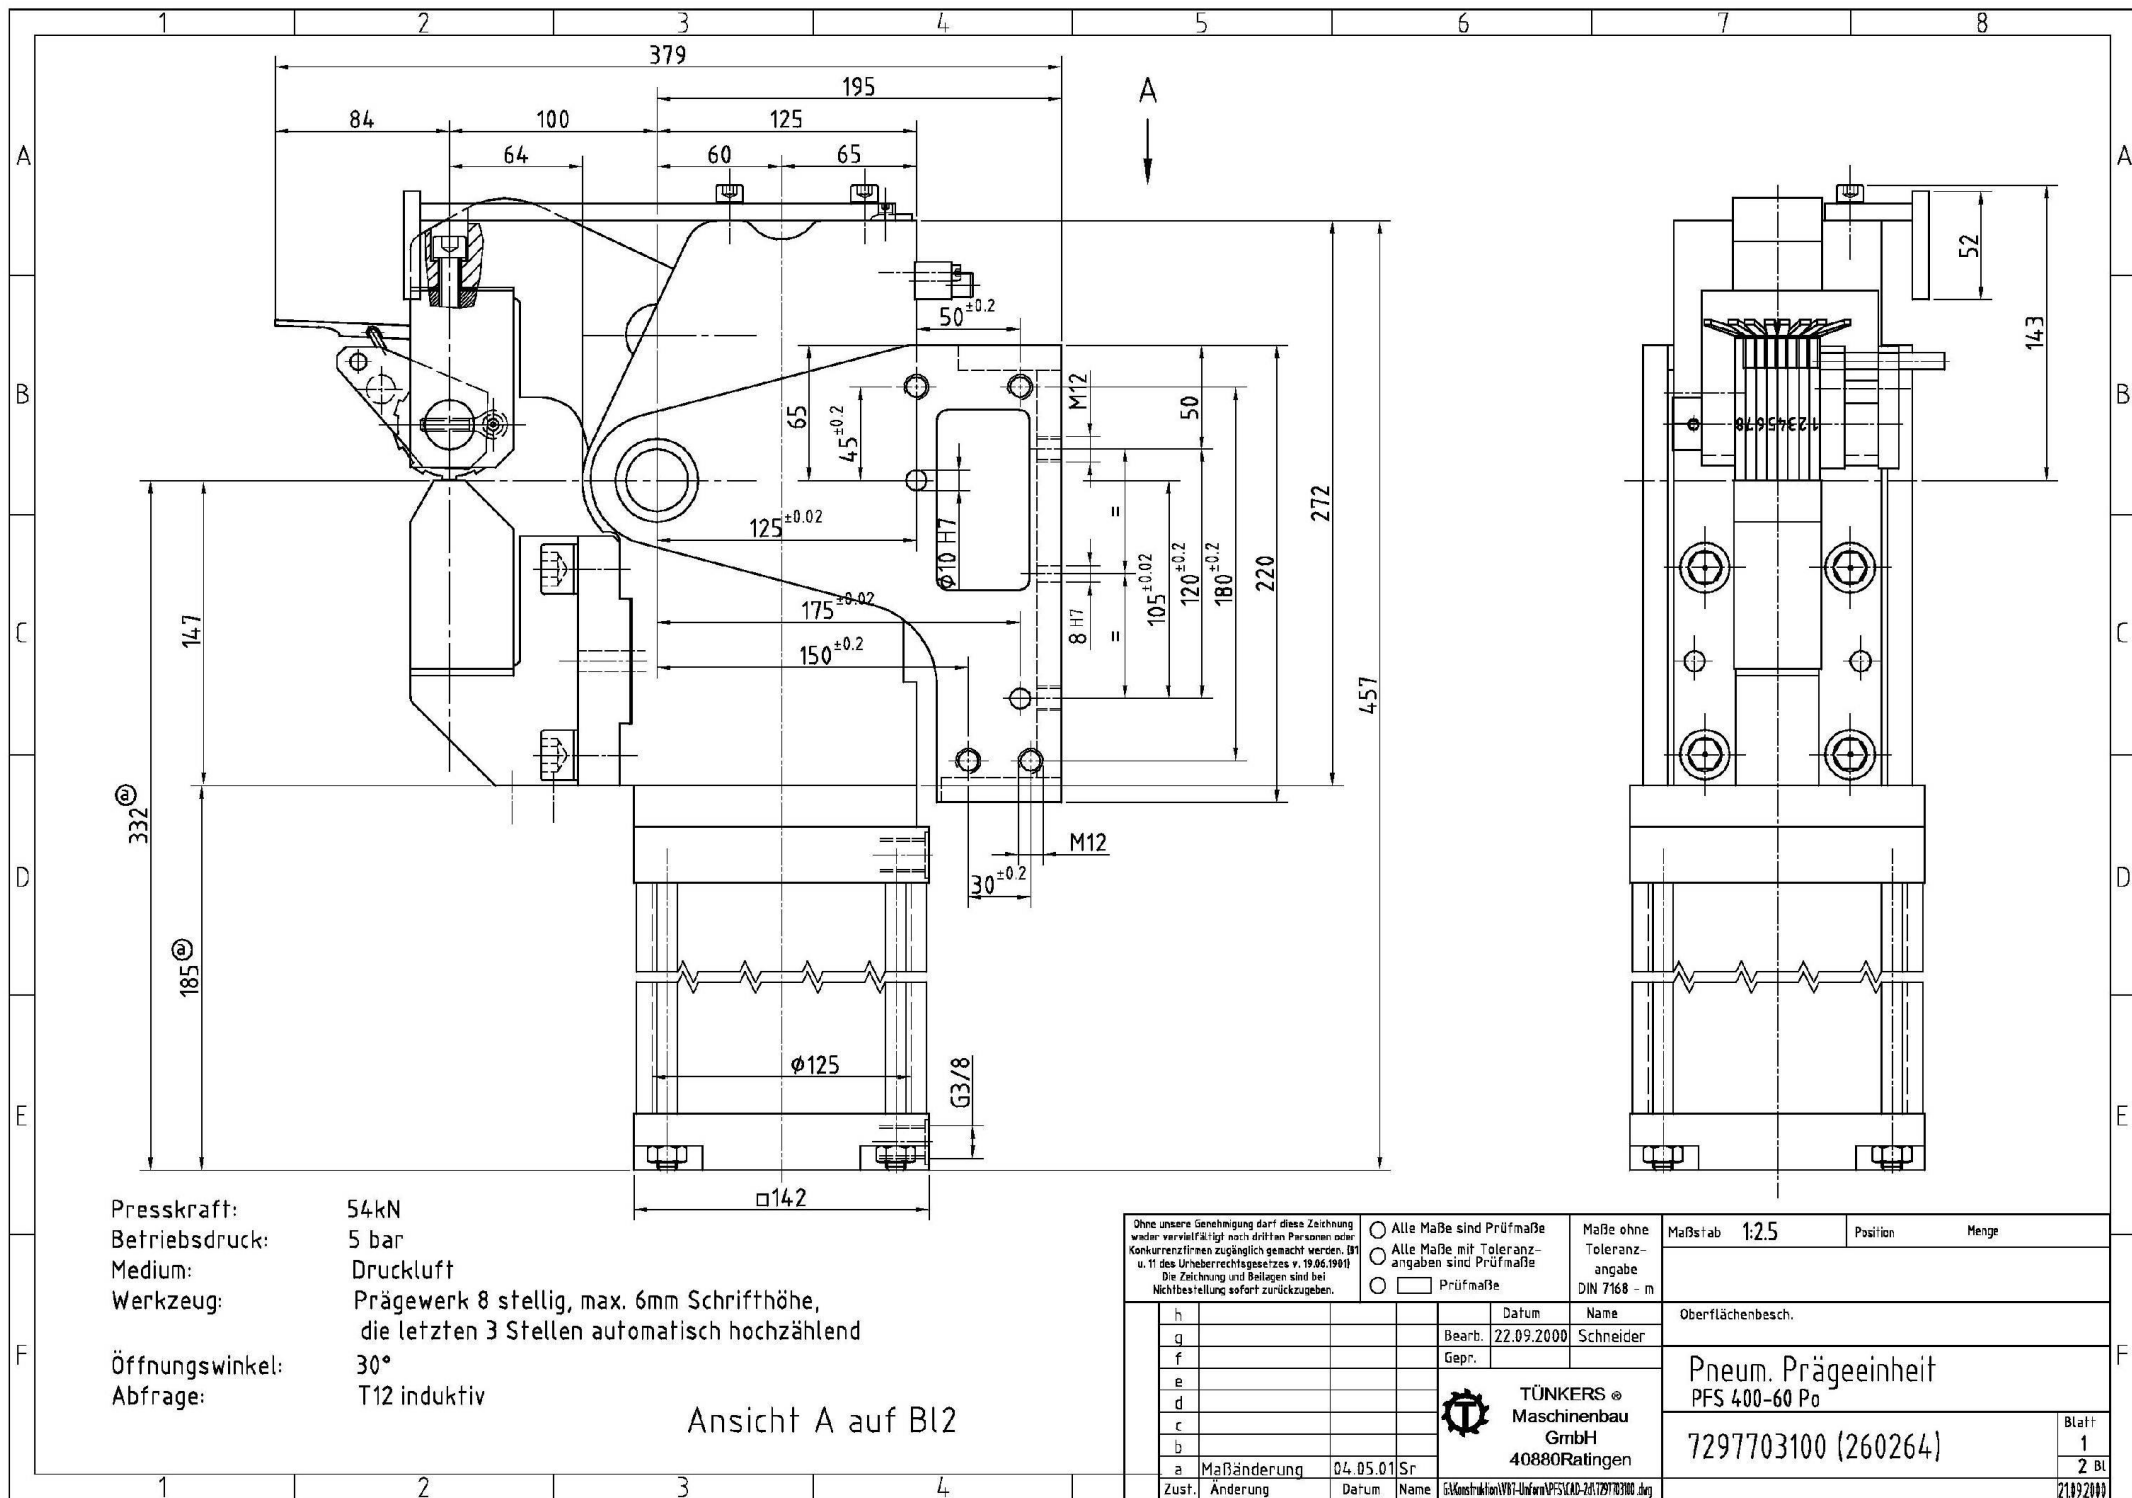


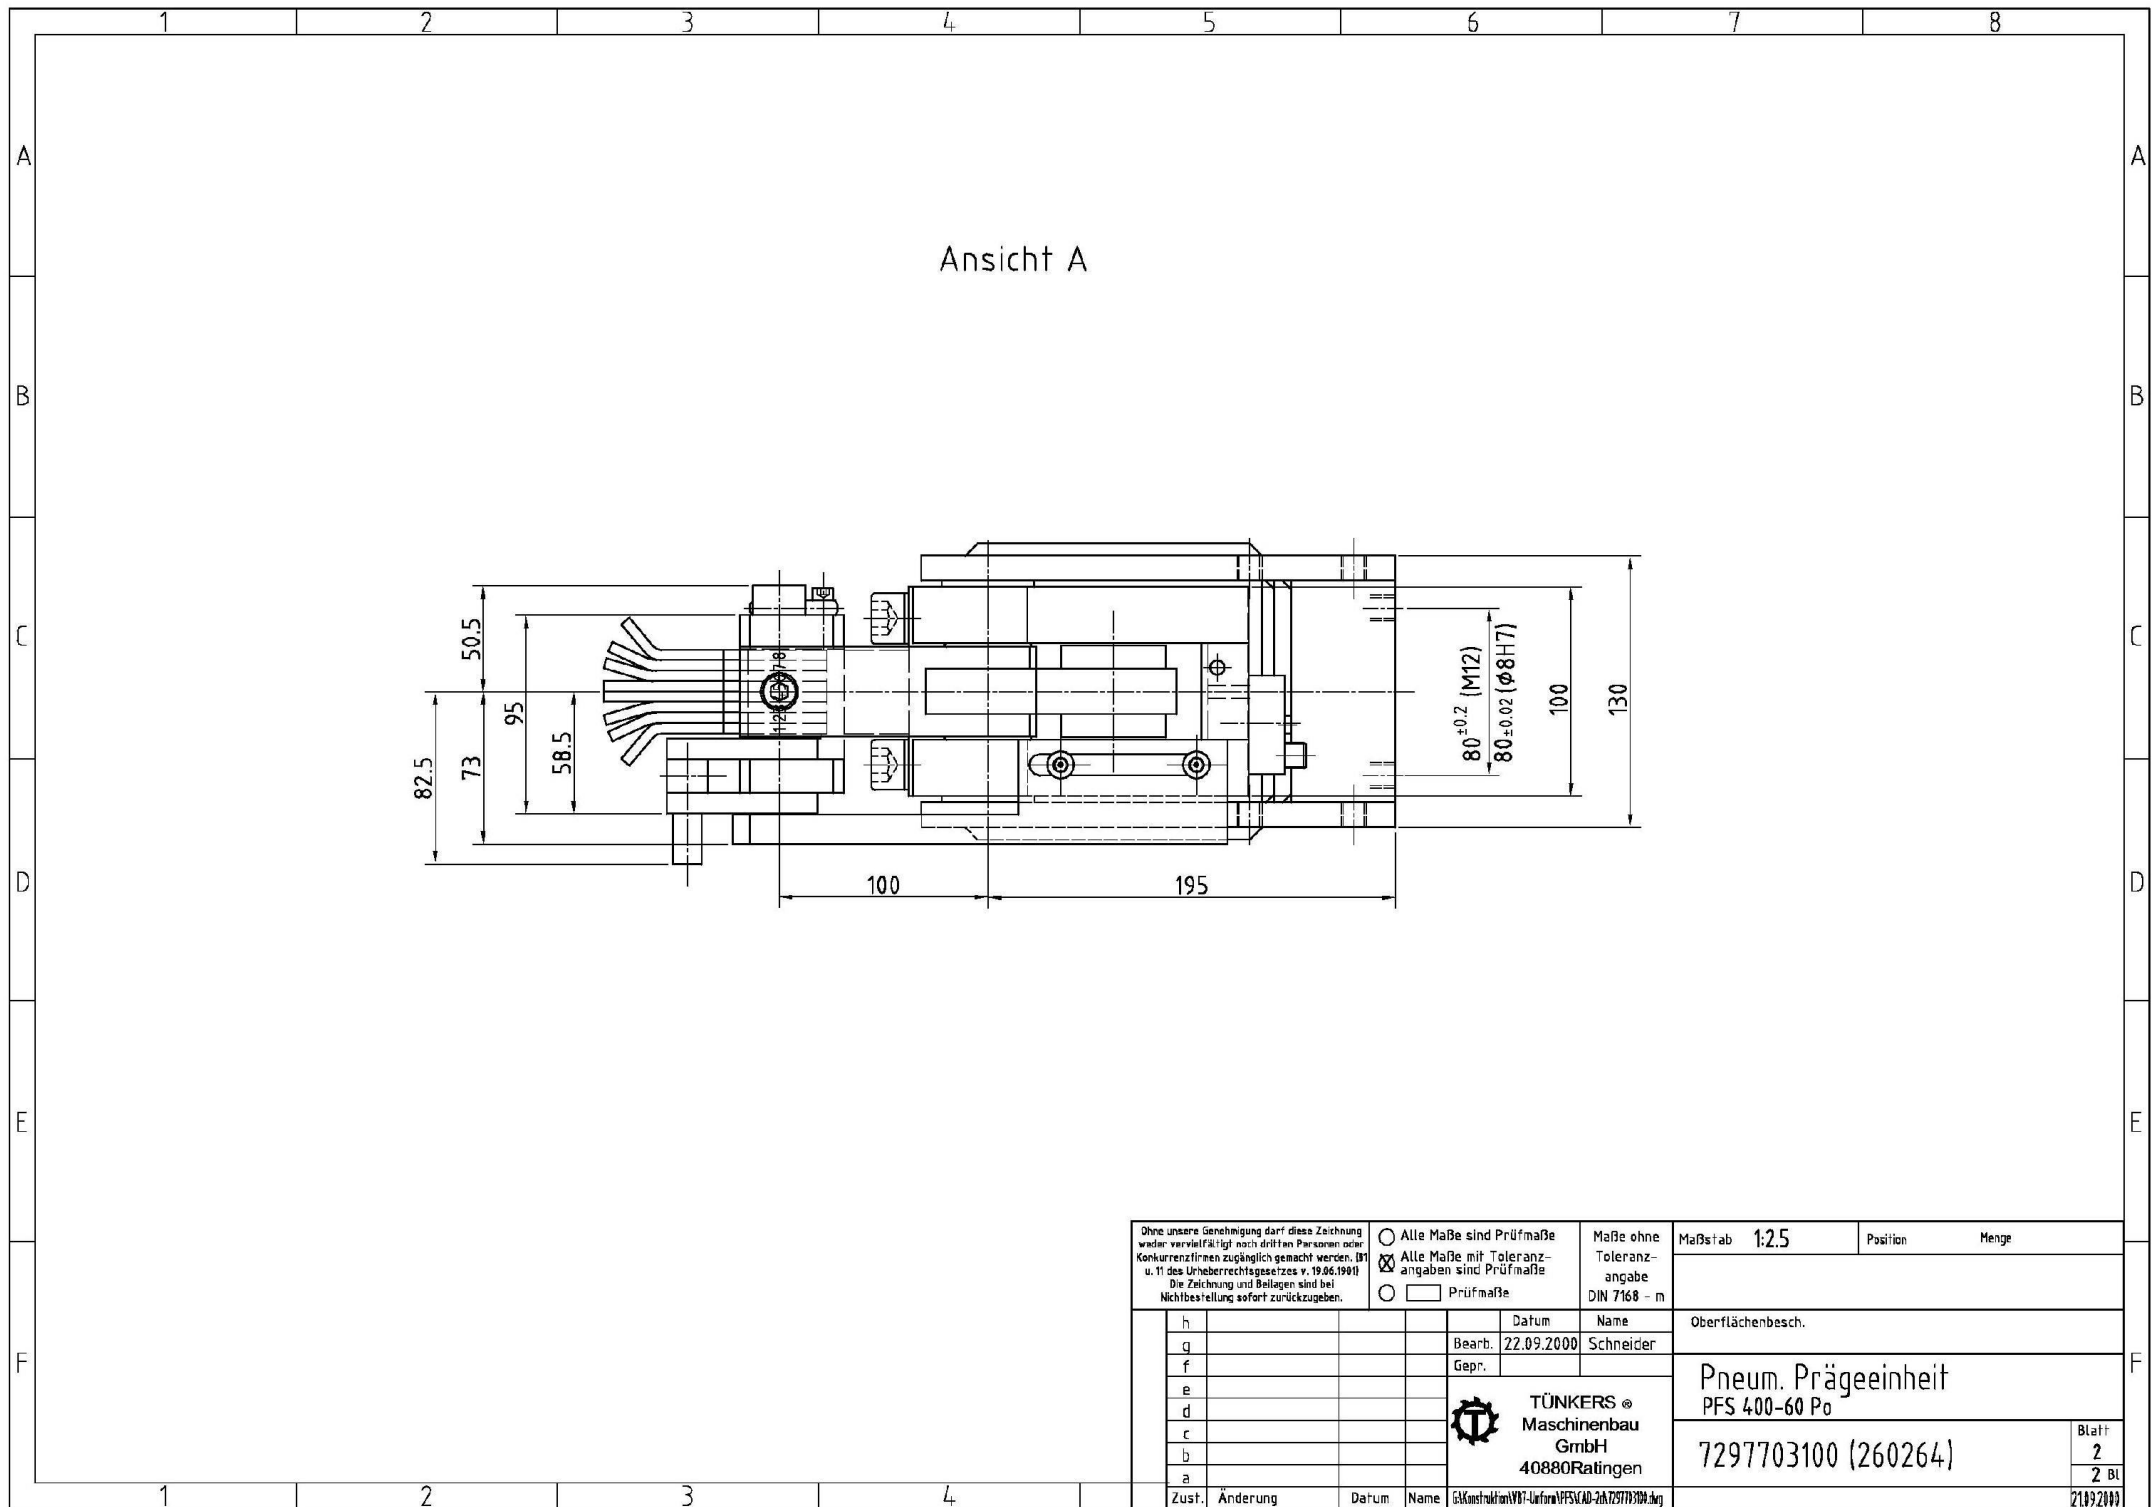

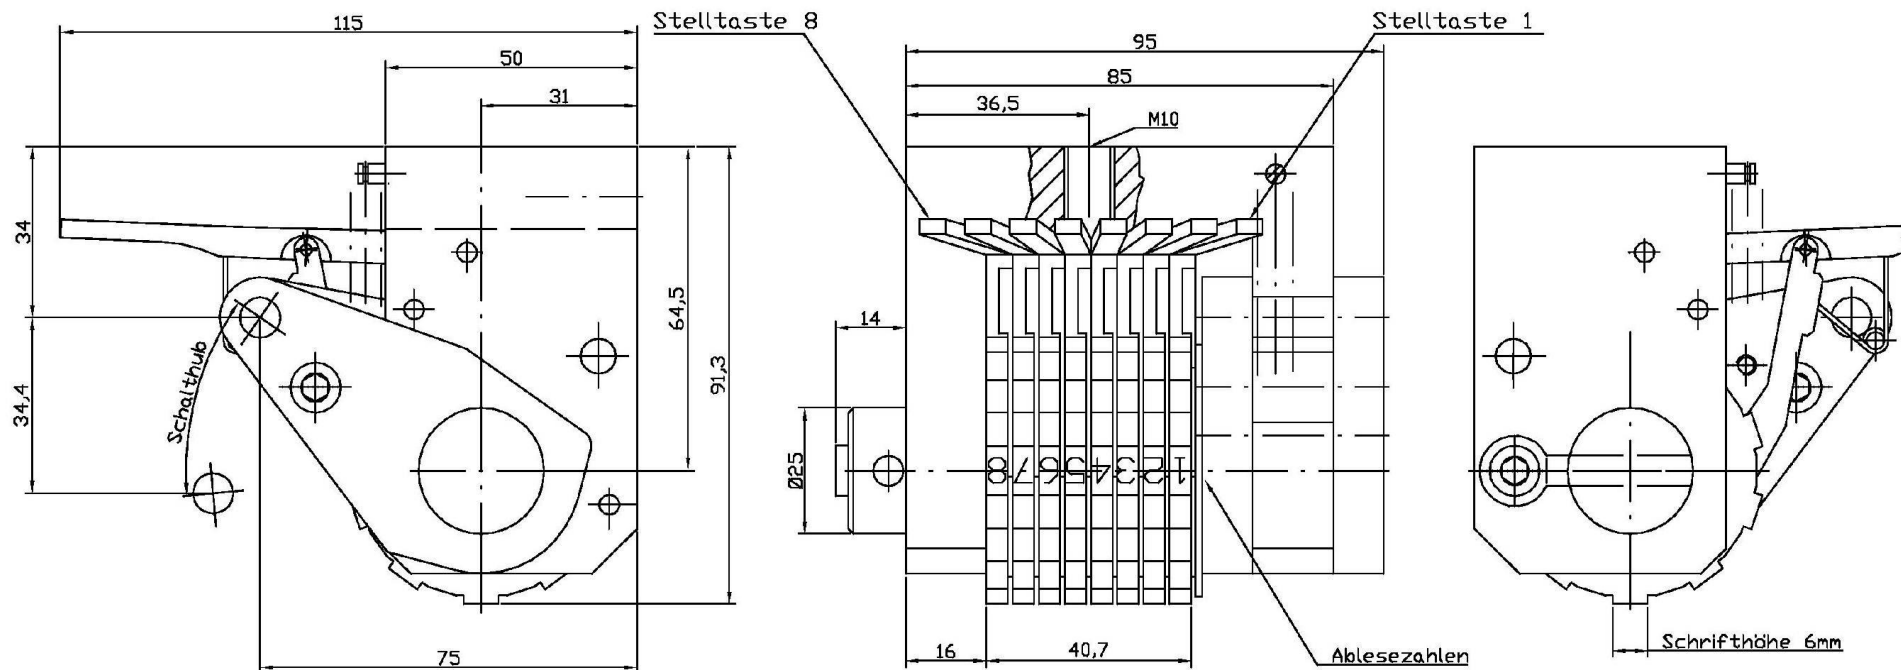


12345678 Abdruck

die letzten 3 Stellen
automatisch hochzählend

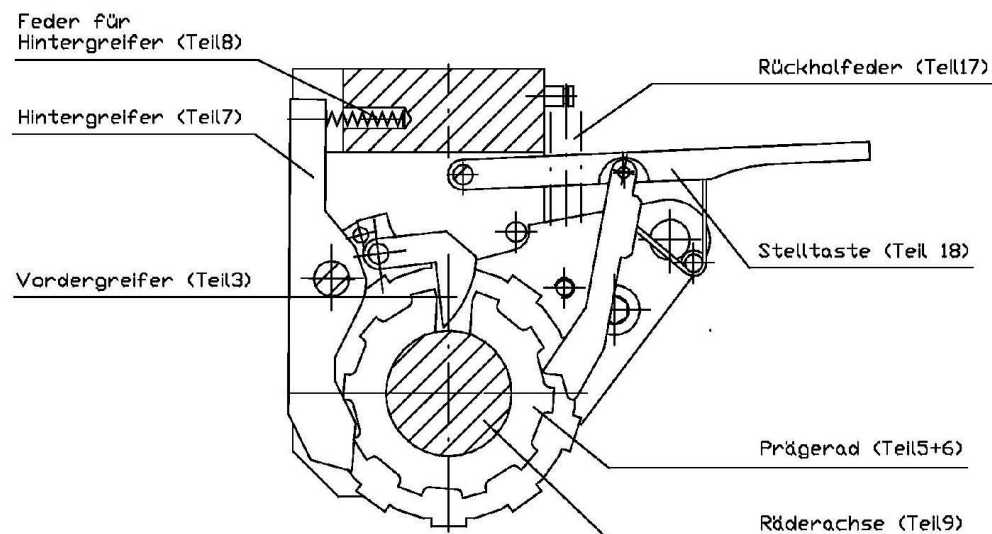

(Verwendungsbereich)				(Zul. Abw.)	(Oberfl.)	Maßstab 1:1	(Gewicht)
						(Werkstoff, Halbzeug) (Rohteil-Nr.) (Modell- oder Gesenk-Nr.)	
				Datum	Name	Prägewerkzeug 8 stellig, 6mm Schriftgröße	
			Bearb.				
			Gepr.				
			Norm				
						Art.Nr. 218238	Blatt
							Blätter
Zust.	Änderung	Datum	Name	Ursprung	Ersatz für:		Ersatz durch:

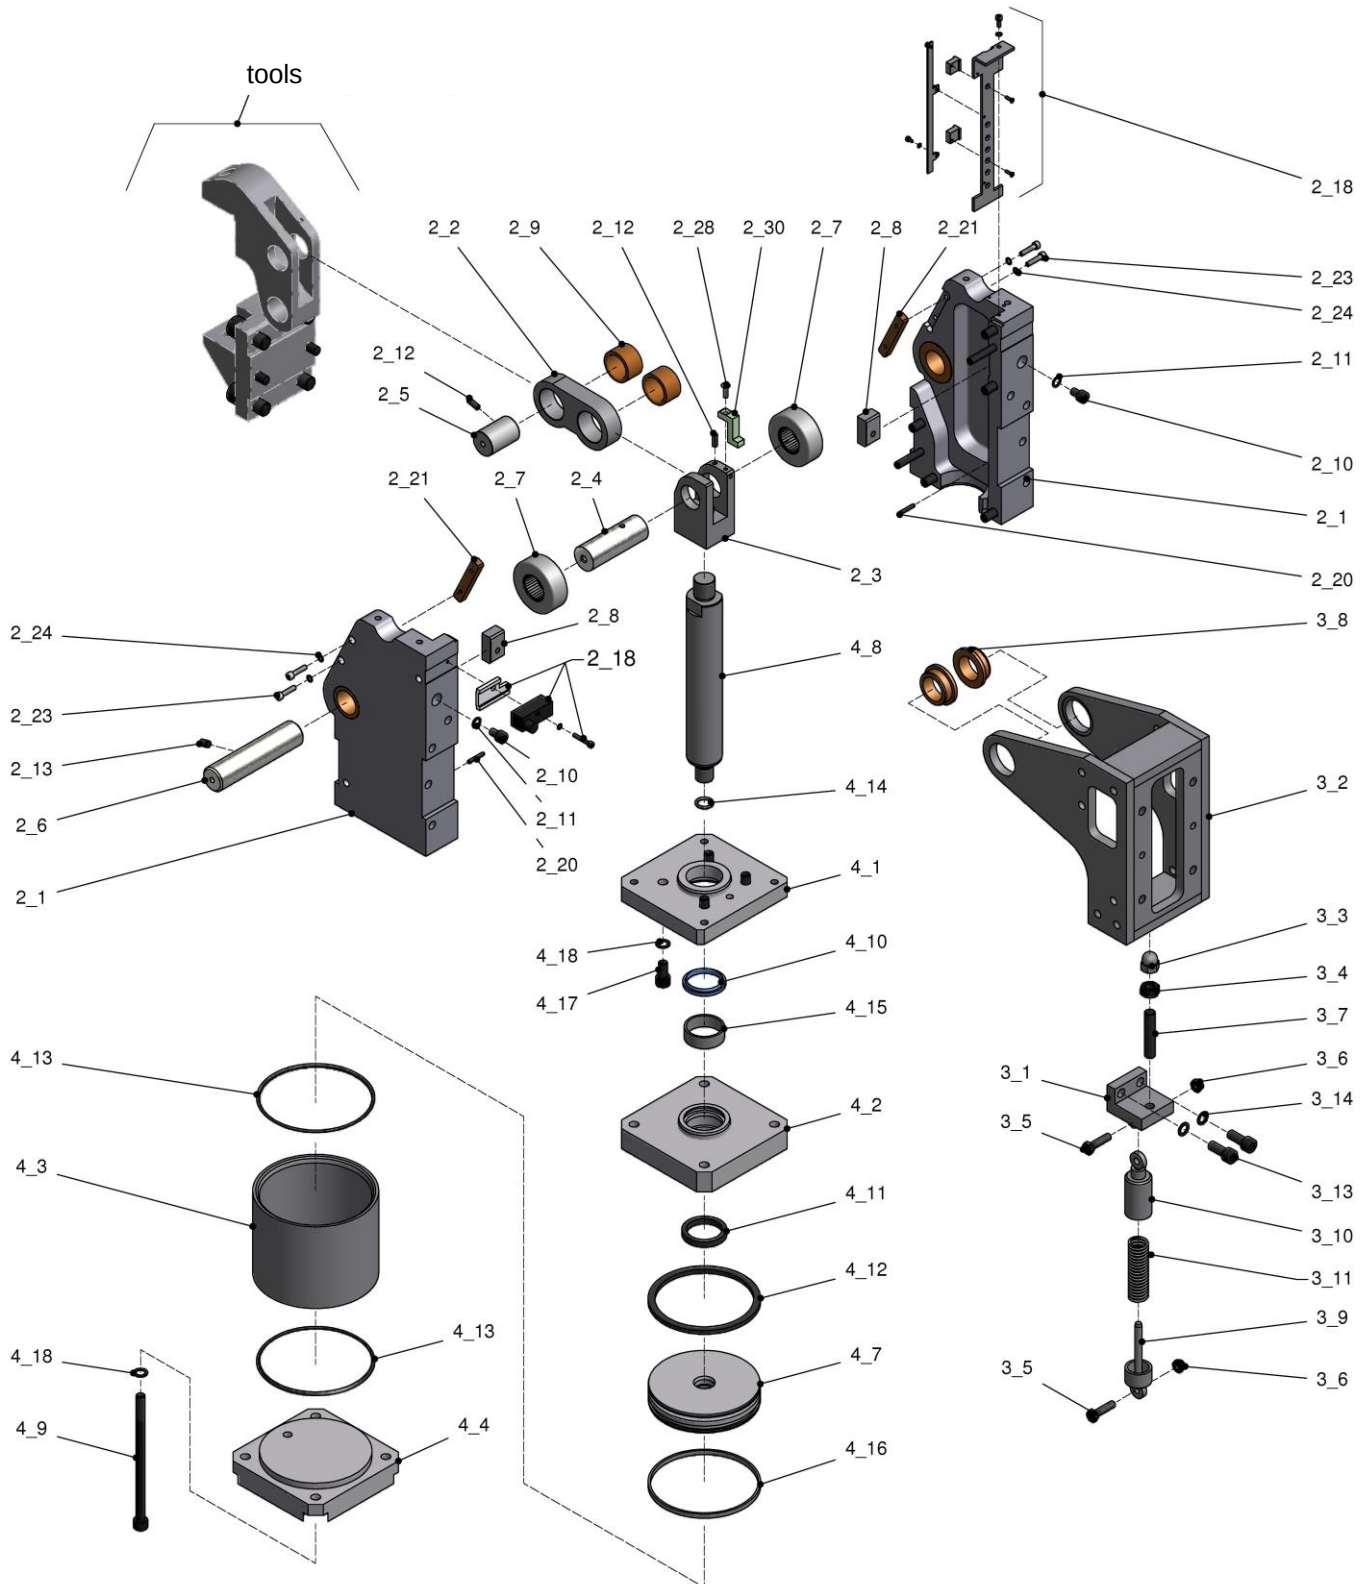

Spare Parts

Pos.	Part No.	Quantity	Description	Type	Flag ¹
2_1	224502	1	housing complete	PFS 400/900	
2_2	210188	1	strap	PFS 400/900	
2_3	224480	1	fork piece	PFS 400/900	
2_4	209899	1	bolt	PFS 400/900	R
2_5	209901	1	bolt	PFS 400/900	R
2_6	202668	1	bolt	PFS 400/900	R
2_7	210310	2	supporting role complete	PFS 400/900	R
2_8	210305	2	support plate	PFS 400/900	R
2_9	209917	2	bush	PFS 400/900	R
2_10	200216	2	hex. socket head cap screw	M 8 x 12 DIN 912	
2_11	200977	2	securing spring washer	S 8	
2_12	225951	2	set screw	M 6 x 16 DIN 913	
2_13	200549	1	set screw	M 8 x 12 DIN 913	
2_20	201189	2	dowel pin	4 x 24 DIN 1481	
2_21	210002	2	guide rail	PFS 400/900	R
2_23	221394	4	hex. socket head cap screw	M 5 x 22 DIN 912	
2_24	200975	5	securing spring washer	S 5	
2_28	258489	1	hexagon socket countersunk head screw	M 5 x 15 DIN 7991	
2_30	393367	1	switch flag	PFS 400/900	

spare parts sets / accessories

Pos.	Part No.	Quantity	Description	Type	
	230239	1	repair kit Ø125	PFS 400	
2_18	243204	1	limit switch set complete T12 30°	PFS 400/900	

¹ R = included with repair kit

Subject to technical modifications.

Spare Parts List

swivel support with spring compensation

PFS 400

Spare parts

Pos.	Part-No.	Quantity	Description	Type	
3_1	210333	1	angle lever complete	PFS 400/900	
3_2	210236	1	swivel support complete	PFS 400/900	
3_3	221439	1	domed cap nut	M 12 DIN 1587	
3_4	200708	1	hexagon nut	M 12 DIN 934	
3_5	200005	2	hexagon bolt	M 8 x 30 DIN 931	
3_6	200728	2	hexagon nut	M 8 DIN 985	
3_7	229347	1	set screw	M 12 x 60 DIN 913	
3_8	224623	2	flanged bush	PFS 400/900	
3_9	209965	1	spring compensation complete (top)	PFS 400/900	
3_10	209966	1	spring compensation complete (bottom)	PFS 400/900	
3_11	211545	1	pressure spring	PFS 400	
3_13	200257	2	hexagon socket head cap screw	M 10 x 25 DIN 912	
3_14	200978	2	securing spring washer	S 10	

Spare parts

Pos.	Part-No.	Quantity	Description	Type	
4_1	210366	1	cylinder receiver	PFS 400/900	
4_2	210402	1	cylinder head	PFS 400	
4_3	210424	1	cylinder tube Ø 125	PFS 400/900 30°	
4_4	210377	1	cylinder bottom	PFS 400/900	
4_5	226913	1	piston	PFS 400/900	
4_6	210154	1	piston rod	PFS 400	
4_7	200274	4	hex. socket head cap screw	M 10 x 170 DIN 912	
4_8	212559	1	scraper	Ø40/48 x 7 x 4	RD
4_9	212579	1	rod seal	Ø 40/50 x 8	RD
4_10	227529	1	piston seal	Ø 125	RD
4_11	201946	2	o-ring	125 x 3	RD
4_12	201695	1	o-ring	18 x 3	RD
4_13	228901	1	driving band	15 x 2.5 x 149	RD
4_14	228902	1	driving band	5.6 x 2.5 x 390	RD
4_15	200256	4	hex. socket head cap screw	M 10 x 20 DIN 912	
4_16	200978	8	securing spring washer	S 10	

spare parts sets / accessories

Pos.	Part-No.	Quantity	Description	Type	
	230172	1.00	seal kit	PFS 400 (with Airzet sealing 125/110x5)	

Spare Parts

Pos.	Part-No.	Quantity	Description	Type	
5_1	210085	1	clamp arm	PFS 400-60 PO	
5_2	224580	1	jaw complete	PFS 400-60 PU/PO	
5_3	200314	4	hexagon socket head cap screw	M 16 x 35 DIN 912	
5_4	200980	4	securing spring washer	S 16,0	
5_5	216363	2	parallel pin	10,0m6 x 40 DIN 7979	
5_6	218238	1	marking tool	PFS 400-60 PU/PO	
5_7	201244	1	parallel pin	8m6 x 60 DIN 6325	
5_8	200258	1	hexagon socket head cap screw	M 10 x 30 DIN 912	
5_9	200978	1	securing spring washer	S 10,0	
5_10	220516	1	punch	PFS 400	
5_11	200217	2	hexagon socket head cap screw	M 8 x 16 DIN 912	
5_12	200977	2	securing spring washer	S 8,0	
5_13	216310	2	adjustment sheet	0,5	
5_14	226984	2	adjustment sheet	1,0	
5_15	226985	2	adjustment sheet	2,0	
5_16	225417	1	switch flag complete left	PFS 400	
5_17	225679	2	adjustment sheet	0,1	
5_18	225681	2	adjustment sheet	0,3	
5_19	228044	2	adjustment sheet	0,2	

